

STAINLESS STEEL STRAND SPLICES

FOR USE ON STAINLESS STEEL STRAND: TYPE 302

TYPE 302 STAINLESS STEEL SPLICES										
Catalog #	Per Carton		Length	Subset	Rod Dia.	Color Code	Rated Strength	Strand		
	Units	Wt/Lbs.						Size	Type	Mean Dia
AS-907	50	40	38	4-4	0.100	Yellow	7,000	1/4"	3W-7W	.259/.240
AS-908	50	50	40	3-3-3	0.100	Black	10,000	9/32"	7W	0.279
AS-909	25	32	44	3-3-4	0.100	Orange	12,000	5/16"	3W-7W	.312/.327
AS-910	25	50	53	4-4-3	0.114	Green	17,000	3/8"	3W-7W	.356/.360
AS-911	20	50	60	3-4-4	0.138	Red	23,000	7/16"	7W	0.435
AS-912	10	42	68	4-4-4	0.138	Blue	29,000	1/2"	7W-19W	.495/.500
AS-913	10	60	80	4-4-4	0.159	Yellow	37,000	9/16"	7W-19W	.564/.565

All Splices are preassembled in subsets and gritted. Left Hand Lay is standard.

All dimensions are in inches - Weights are in pounds.

FOR USE ON STAINLESS STEEL STRAND: TYPE 316

TYPE 316 STAINLESS STEEL SPLICES										
Catalog #	Per Carton		Length	Subset	Rod Dia.	Color Code	Rated Strength	Strand		
	Units	Wt/Lbs.						Size	Type	Mean Dia
AS-907	50	40	38	4-4	0.100	Yellow	7,000	1/4"	3W-7W	.259/.240
AS-908	50	50	40	3-3-3	0.100	Black	10,000	9/32"	7W	0.279
AS-909	25	32	44	3-3-4	0.100	Orange	12,000	5/16"	3W-7W	.312/.327
AS-910	25	50	53	4-4-3	0.114	Green	17,000	3/8"	3W-7W	.356/.360
AS-911	20	50	60	3-4-4	0.138	Red	23,000	7/16"	7W	0.435
AS-912	10	42	68	4-4-4	0.138	Blue	29,000	1/2"	7W-19W	.495/.500
AS-913	10	60	80	4-4-4	0.159	Yellow	37,000	9/16"	7W-19W	.564/.565

All Splices are preassembled in subsets and gritted. Left Hand Lay is standard.

All dimensions are in inches - Weights are in pounds.

STRAND SPLICE



MATERIALS:

Splice - Type 302 & 316 Stainless Steel and Galvanized Steel "B" Coat.

Identification Tag – shows catalog number and nominal size strand.

Color Code & Center Marks – establishes alignment of rods & identifies strand diameter range.

Subsets – rods are glued and gritted in groups of two, three or four sets.

GENERAL RECOMMENDATIONS

For joining or repairing stainless steel and galvanized steel strand or messenger. Strand splices should not be used after original installation.

Strand splices permit the spinner to travel over the splice without lifting the spinner or adjusting the gates.

RATED HOLDING STRENGTH:


The RATED HOLDING STRENGTH of strand splices have a RATED HOLDING STRENGTH of 100% of published strand ratings.

STRAND SPLICE

For Use On: Galvanized Steel Strand

HOW TO ORDER:

Select catalog number by nominal size listing. Consult *ADSCO* Line Products for sizes and strandings not listed.

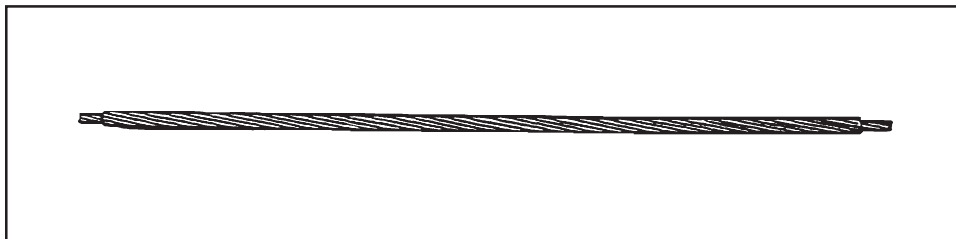

CAT #	STRAND SIZE	STRAND CONST.	MEAN DIA.	UNITS PER CARTON	WT. PER CARTON POUNDS	APPLIED LENGTH INCHES	ROD DIA. INCHES	SUB SETS	COLOR CODE
73-0250	1/4	3W 7W	.259 .240	50	30	35	.086	2	YELLOW
73-0281	9/32	7W	.279	50	34	38	.086	2	BLUE
73-0312	5/16	3W 7W	.312 .312	50	52	42	.100	3	BLACK
73-0375	3/8	3W 7W	.356 .360	25	36	50	.100	3	ORANGE
73-0437	7/16	7W	.435	25	59	56	.119	3	GREEN
73-0500	1/2	7W 19W	.495 .500	15	57	63	.159	3	BLUE
73-0562	9/16	7W 19W	.564 .565	10	61	70	.188	4	YELLOW

Left Hand Lay Standard